



AG Series

Model	AG2000	AG2000-ZX
Compatible Printers	EZ-2250i (203dpi, 7ips) EZ2350i (300dpi, 6ips)	ZX1200i (203dpi, 10ips) ZX1300i (300dpi, 7ips)
Label Roll Diameter	Up to 200mm (Internal roll holder)	
Core Sizes	1.5" - 3" (38.1mm - 76.2 mm)	
Label Dimensions	Length 30mm - 150mm Width 25mm - 110mm	
Max. conveyor speed	Up to 300mm per second	Up to 400mm per second
Weight	7Kg (22Kg – including Printer)	7Kg (22Kg – including Printer)
Dimensions	Length 870mm (1000mm with printer) Height 200mm (380mm with printer) Width 240mm (305mm with printer)	870mm (965mm with printer) 200mm (400mm with printer) 240mm (270mm with printer)

Suggested application:



* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

** Minimum label length- and width compliance may depend on variables such as label material, -thickness, spacing, liner construction, etc. Godex will be pleased to test non-standard materials and critical sizes. GoDEX does not supply conveyors of any kind.



AG Series

Model	AG3000T	AG3000-LS
Compatible Printers	ZX Series (ZX1200i, ZX1300i, Z1600i)	
Required Air Pressure	5 - 6 bar	
Std. Head Size	60mm x 60mm / 100mm x 100mm	
Opt. Head Sizes	20mm x 20mm up to 110mm x 200mm	
Stroke	300mm	500mm
Effective stroke**	170mm	370mm
Label Sizes	Min 20mm x 20mm Max 100 x 200mm	
Label Roll Diameter	200mm standard inside the printer 280mm optional with external holder	
Weight	16Kg without printer / 30Kg including printer)	
Dimensions	Length	482mm (incl. printer)
	Height	525mm (incl. printer)
	Width	560mm (incl. printer)

- (The effective stroke equals the maximum allowed height difference between the products in one production batch)

Suggested application:



* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

** Minimum label length- and width compliance may depend on variables such as label material, -thickness, spacing, liner construction, etc. Godex will be pleased to test non-standard materials and critical sizes. GoDEX does not supply conveyors of any kind.



Cutter Stacker

Model


Compatible Printers	ZX1200i (203dpi, 10ips) ZX1300i (300dpi, 7ips) ZX1600i (600dpi, 4ips)
Suitable Materials	Satin, nylon, patch labels, paper, card board, hang tags, PP, PVC, PE
Label Width	Min. 20mm – max. 100mm (95mm if the material is on a liner)
Length	Min. 20mm – max. 150mm
Thickness	0,045mm – 0,85mm (50μ-800μ)
Weight	Up to 325g/ m2
Performance	Up to 120 labels/ minute
Overall Dimensions	
Length	(incl. printer and stand) 651mm
Height	(incl. printer and stand) 437mm
Width	(incl. printer and stand) 270mm
Weight	7Kg without printer / 20Kg including printer

Suggested application:



* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

** Minimum label length- and width compliance may depend on variables such as label material, -thickness, spacing, liner construction, etc. Godex will be pleased to test non-standard materials and critical sizes. GoDEX does not supply conveyors of any kind.

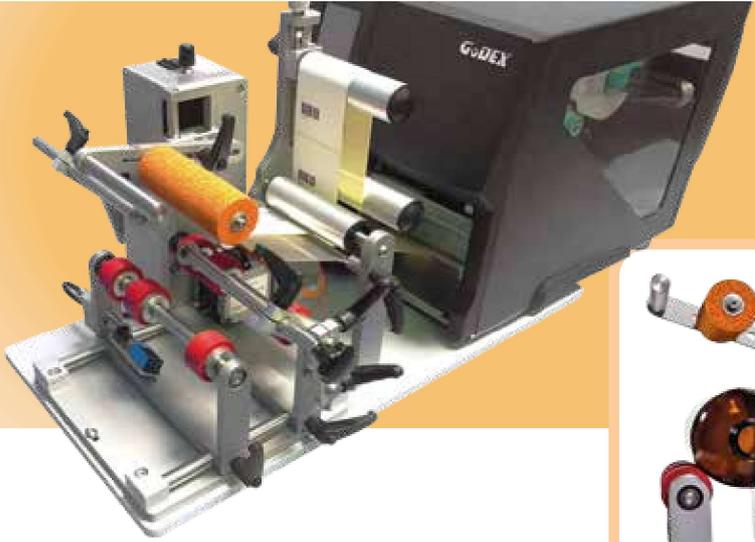

Bottle Applicator

Model	AG1000F
Compatible Printers	ZX1200i (203dpi, 10ips) ZX1300i (300dpi, 7ips) ZX1600i (600dpi, 4ips)
Power	24V / 1,5A max, provided through printer GPIO interface
Min. product diameter	20mm
Max. product diameter	120mm
Operation speed	2ips / 4ips
Weight	8 kg
Dimensions	560mm x 350mm x 330mm (without printer)
Dimensions	800 – 940mm x 350mm x 330mm (with printer)

Suggested application:



* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

** Minimum label length- and width compliance may depend on variables such as label material, -thickness, spacing, liner construction, etc. Godex will be pleased to test non-standard materials and critical sizes. GoDEX does not supply conveyors of any kind.

Accessories



T10(c*) / T20(c*) / T30(c*)

Model	T10(c*)	T20(c*)	T30(c*)
Paper width	4.72" (Max.)	7" (Max.)	8.46"
Rewind Speed	Up to 14 IPS	Up to 14 IPS	6 IPS
Label Roll	8" (Max.)	6" (Max.)	6.3" (Max.)
Core Roll	Coreless, 1" (25.2~25.6mm), 1.5"x2 (37.4~38.0mm & 40~40.6mm), 3" (76~76.6mm)		
Label Roll Weight	5 Kg		5.5Kg (12lb)
Rewinding	Label Inside / Outside		
Power	100~240VAC 24W, 24V Adapter		
Size (H*W*D)	303 mm*180 mm*349 mm	303 mm*180 mm*394mm	303 mm*230 mm*349 mm
Agency Approvals	CE, FCC Class A		
Weight		5 Kg (11 lb)	5.5Kg (12lb)


- Modular core adaptor fits 1", 1.5" & 3" core sizes.
- Colored LED indicator provides rewinder operation status.
- Rewinding direction switch to rewind "inside or outside" label rolls.
- Easy assembly lock module for quickly and firmly label roll holding.

* External InkJet Label Printer Rewinder/ Unwinder

Suggested application:



Accessories

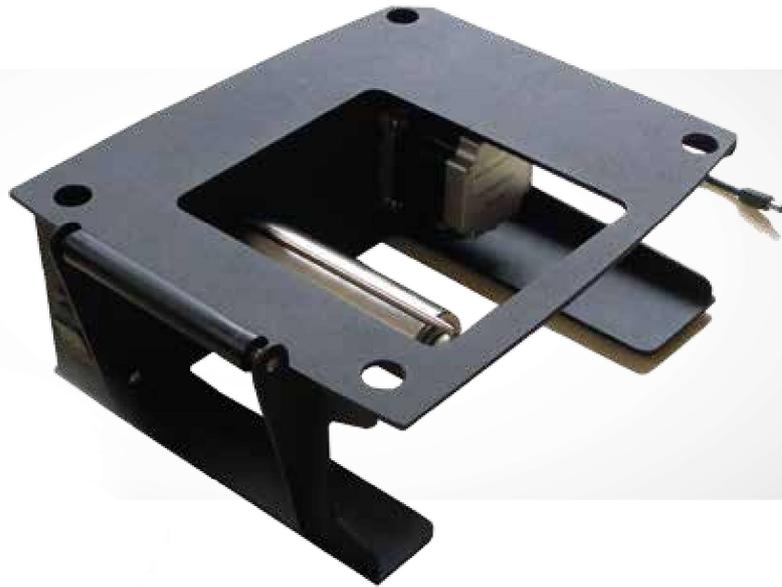

UN 208(RT)

Model	UN 208	UN 208RT
Compatible Printers	G500 series	RT700 series, RT863i

Backing Paper Rewinder

